


Features

- Compatible with 4" standard ceiling hole
- High efficiency, Energy saving
- Excellent performance and no glare
- Slim, stylish and light weight design
- Easy to install
- Damp and Wet location


4" Downlight

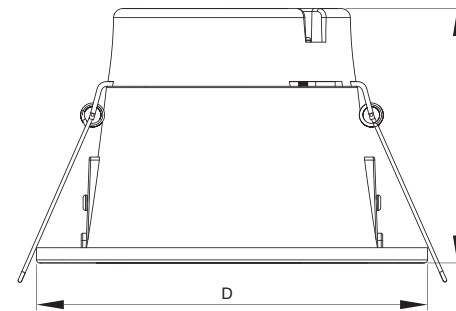

| | | | |
|-----------|--------------|--------------|---------------|
| Diameter: | 5.04in/128mm | Carton size: | 345*315*315mm |
| Height: | 3.31in/84mm | Q'ty/ctn: | 12 pcs |

Applications

- Widely used in homes, offices, restaurants, hotels,
- buses, trains, warehouses, parking lots, meeting room school, library, factory, warehouse, casino, parking garage, hospital, commercial center, supermarket, shopping mall etc

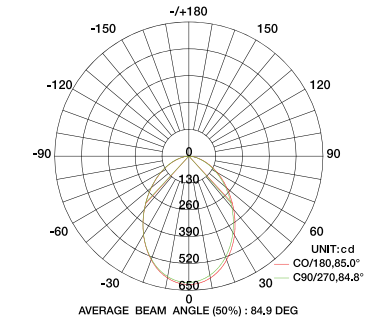

| Item Code | Description | Wattage | Color Temp | Input Voltage | Output Lumen | Equiv.wattage | CRI | Beam Angle | Dimmable |
|------------------|--------------------|---------|------------|---------------|--------------|---------------|-----|------------|----------|
| DX-DL4-EU-02A-9W | LED8DL4 | 9W | 2700-6500K | 230V 50Hz | 650LM | 50W | 80 | 85° | NO |
| DX-DL4-EU-03A-9W | LED8DL4/ANTI-GLARE | 9W | 2700-6500K | 230V 50Hz | 650LM | 50W | 80 | 85° | NO |
| DX-DL4-EU-02A-9W | LED8DL4 | 9W | 2700-3000K | 230V 50Hz | 500LM | 50W | 90 | 85° | NO |
| DX-DL4-EU-03A-9W | LED8DL4/ANTI-GLARE | 9W | 2700-3000K | 230V 50Hz | 500LM | 50W | 90 | 85° | NO |

